


LED LAMP


E5 SERIES

PANEL LIGHT

www.aigostar.com



◆INSTALLATION DIAGRAM

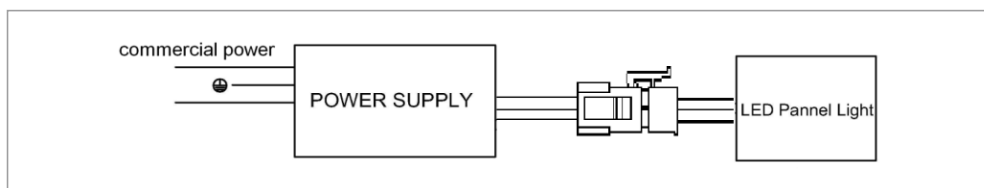

DAY LIGHT 6000K


NATURAL WHITE 4000K

PACKING 1pc/colour box

V	220-240V	On/Off	≥20,000
Life	40000H	Beam Angle	120°
Ra	≥ 80	Hg	<0.1%
PF	> 0.9	EEI	A+
IP	20	optimal Ta	-20°~40°

Size

PL03 40W :295x1195x10mm



product code	Model	K	W	LM	mA	Chip QTY	PCS CTN	kWh/1000h	Certification
182007	E5 PL03 40W	6000K	40	3150	1050	192	5	40	CE, CB, GS
182526	E5 PL03 40W	4000K	40	3150	1050	192	5	40	CE, CB, GS




warning


- Power should be cut off before installation, maintenance or inspection.
- Please install and use the light strictly according to the instruction.
- Do not disassemble or remold the product at will to avoid accident of electric shock or light falling.

SPECTRUM >>>

E5 PL03 40W 6000K

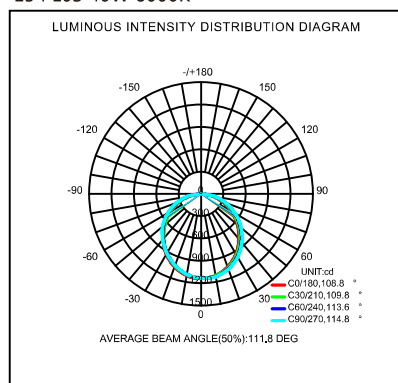

E5 PL03 40W 4000K

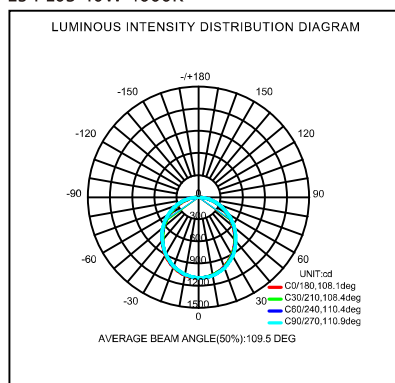

warning

- Power should be cut off before installation, maintenance or inspection.
- Please install and use the light strictly according to the instruction.
- Do not disassemble or remold the product at will to avoid accident of electric shock or light falling.